

**STEEL | WOOD | CONCRETE SLAB (APPROXIMATELY 3-4"), ACOUSTITECH VP,  
SUSPENDED CEILING WIRES AND CHANNELS | FLOATING**

Acoustic performance

AIIC: 55 to 59

ASTC: 58 to 62

**ASSEMBLY DETAILS**

**STRUCTURE**

Steel

**ASSEMBLY COMPONENTS**

Concrete slab (approximately 3-4"),  
AcoustiTECH VP, Suspended ceiling  
wires and channels

**FLOOR TYPE**

Wood

**INSTALLATION TYPE**


Floating

**CEILING TYPE**

Suspended

**NUMBER OF GYPSUM**

1

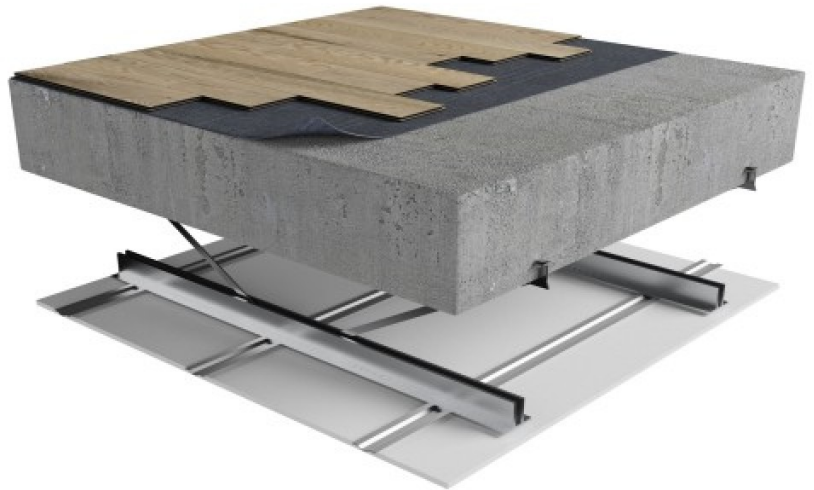

**ACOUSTITECH VP**



Plus de détails