
STEEL | WOOD | CONCRETE SLAB (APPROXIMATELY 3-4“), ACOUSTITECH LEAD 4.5, SUSPENDED CEILING WIRES AND CHANNELS | DOUBLE GLUED DOWN

Acoustic performance
AIIC: 54 to 58
ASTC: 58 to 62

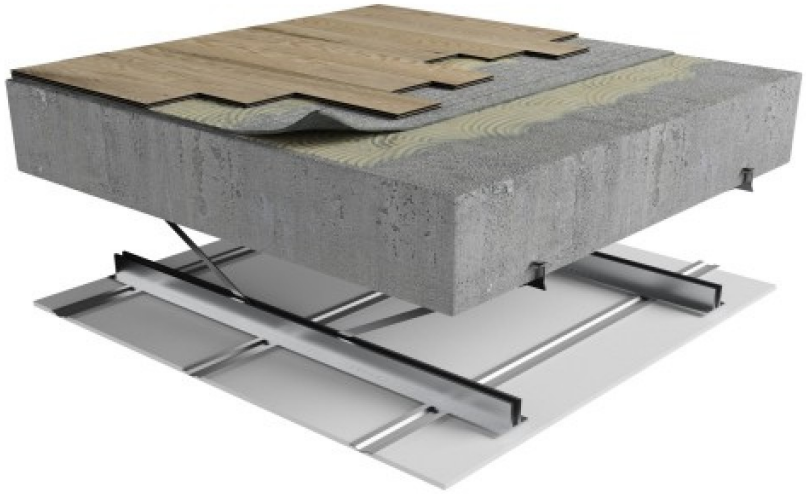

ASSEMBLY DETAILS

STRUCTURE

Steel

ASSEMBLY COMPONENTS

Concrete slab (approximately 3-4“), AcoustiTECH Lead 4.5, Suspended ceiling wires and channels

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE

Adhesive AD-532+, Adhesive AD-316, Adhesive AD-844 MS

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

ADHESIVE AD-532+



Plus de détails

ACOUSTITECH LEAD 4.5



Plus de détails

ADHESIVE AD-316



Plus de détails

ADHESIVE AD-844 MS



Plus de détails