

STEEL | WOOD | ACOUSTITECH LEAD 3.3, SUSPENDED CEILING WIRES AND CHANNELS, CONCRETE SLAB (APPROXIMATELY 3-4") | DOUBLE GLUED DOWN

Acoustic performance

AIIC: 52 to 56

ASTC: 58 to 62

ASSEMBLY DETAILS

STRUCTURE

Steel

ASSEMBLY COMPONENTS

AcoustiTECH Lead 3.3, Suspended ceiling wires and channels, Concrete slab (approximately 3-4")

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE


Adhesive AD-532+, Adhesive AD-316, Adhesive AD-844 MS

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

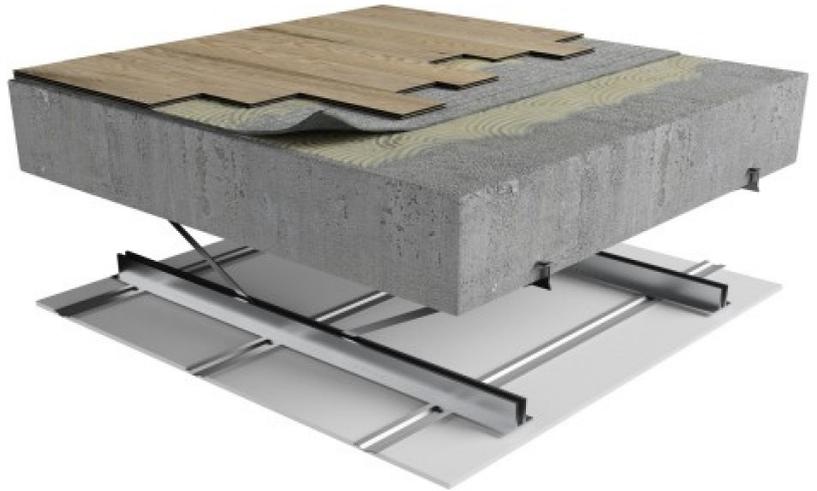

ACOUSTITE CH LEAD 3.3



Plus de
détails

ADHESIVE AD-532+



Plus de
détails

ADHESIVE AD-316



Plus de
détails

ADHESIVE AD-844 MS



Plus de
détails