
CONCRETE | WOOD | ACOUSTITECH LEAD 4.5, SUSPENDED CEILING WIRES AND CHANNELS | DOUBLE GLUED DOWN

Acoustic performance
AIIC: 65 to 73
ASTC: 65 to 70

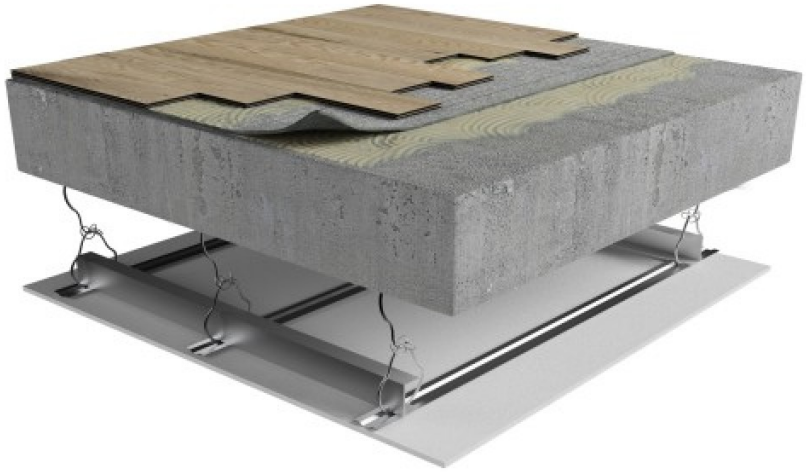

ASSEMBLY DETAILS

STRUCTURE

Concrete

ASSEMBLY COMPONENTS

AcoustiTECH Lead 4.5, Suspended ceiling wires and channels

FLOOR TYPE

Wood

INSTALLATION TYPE

Double glued down

GLUE

Adhesive AD-844 MS, Adhesive AD-316, Adhesive AD-532+

CEILING TYPE

Suspended

NUMBER OF GYPSUM

1

ADHESIVE AD-844 MS	ACOUSTITECH LEAD 4.5	ADHESIVE AD-316	ADHESIVE AD-532+
			
Plus de détails	Plus de détails	Plus de détails	Plus de détails