
LIGHT WOOD | CERAMIC | 1“1/2 CONCRETE TOPPING, 5/8“ T&G PLYWOOD, ACOUSTITECH CERAMIC, FLEXIBLE MORTAR, MORTAR, INSONOMAT (SOPREMA), RC-1 BOOST (PAC INTERNATIONAL) | MORTAR

Acoustic performance
AIIC: 48 to 53
ASTC: 58 to 62

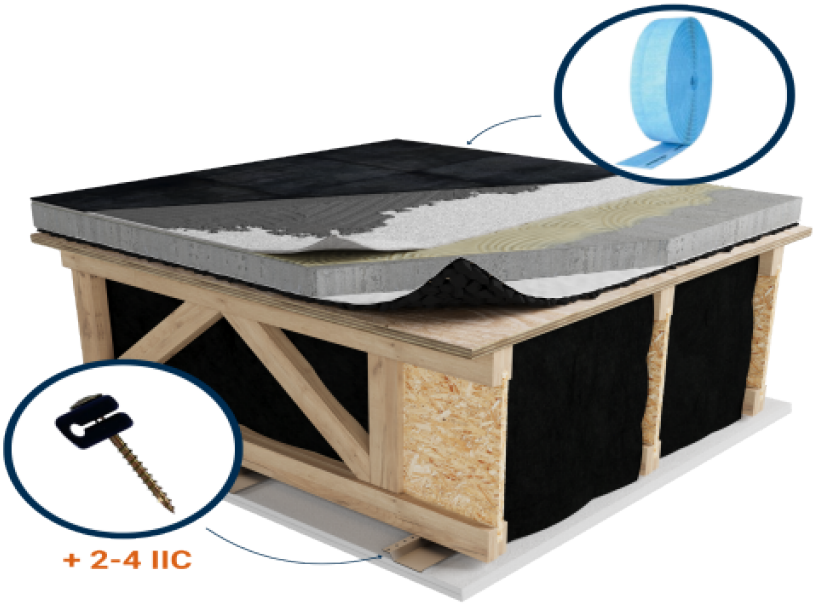

ASSEMBLY DETAILS

STRUCTURE

Light wood

ASSEMBLY COMPONENTS

1“1/2 concrete topping, 5/8“ T&G plywood, AcoustiTECH Ceramic, Flexible mortar, Mortar, Insonomat (Soprema), RC-1 Boost (PAC International)

FLOOR TYPE

Ceramic

INSTALLATION TYPE

Mortar

GLUE

Adhesive AD-280

CEILING TYPE

Resilient channels

NUMBER OF GYPSUM

2

*OTHER MEMBRANES AVAILABLE :

The Insonomat membrane (Soprema) can be substituted with the Silentcrete membrane (Soprema) and the Silent Floor Pur membrane *(See assembly picture above).*

**Perimeter decoupling: The use of Silent Edge (Rothoblaas) is strongly recommended to prevent lateral vibration transfer.*

ACOUSTITECH CERAMIC



Plus de détails

ADHESIVE AD-280



Plus de détails

INSONOMAT (SOPREMA)



Plus de détails

RC-1 BOOST (PAC INTERNATIONAL)



Plus de détails